


WATER HEATERS TO, TO/E NEW, SMALL, EFFICIENT




- New design
- In versions of **5.1** and **10.1**
- TO version - fixed temperature by thermostat
- TO/E version - touchscreen with the possibility to set the temperature
- Enameled pressure tank
- Heating element with the power of 1,5kW
- Installation under (version IN) or above (version UP) the consumption point
- Easy installation
- 100% recyclable packaging
- New safety valve
- Nickel-plated heating element
- New generation of the polyurethan insulation
- Energy efficiency class A



www.dzd.cz/en

 **DRAŽICE**
MEMBER OF THE NIBE GROUP

Dimensions drawing:

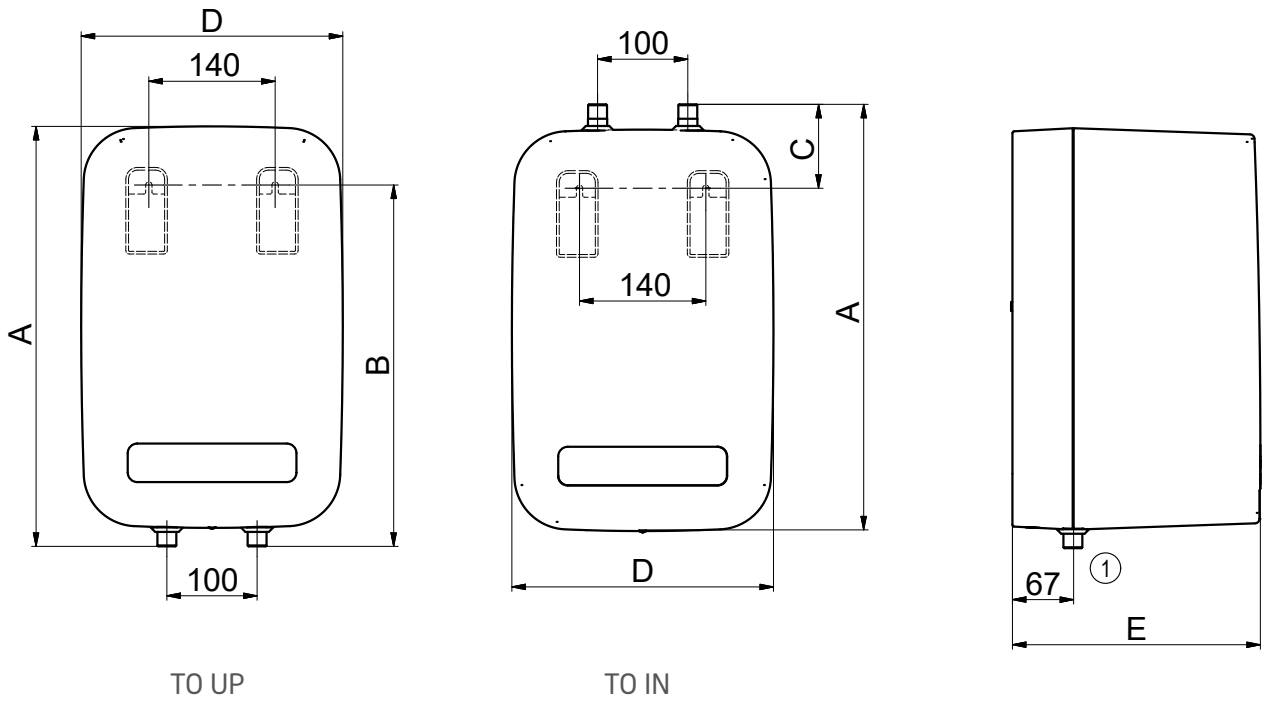

Model TO
fixed temperature
by thermostat



Model TO/E
touchscreen with
the possibility to set
the temperature



Technical specifications:

Typ	TO 5.1 UP TO/E 5.1 UP	TO 10.1 UP TO/E 10.1 UP	TO 5.1 IN TO/E 5.1 IN	TO 10.1 IN TO/E 10.1 IN
Volume [L]	4.6	9.6	4.6	9.6
Thermal conductivity of the insulation λ [$W \cdot m^{-1} \cdot K^{-1}$]	0.022	0.022	0.022	0.022
Power input of the heating element [W]	1500	1500	1500	1500
Electrical connection	1/N/PE~230 V / 50 Hz			
Circuit breaker value - recommended [A]	16	16	16	16
IP protection	IPX5	IPX5	IPX5	IPX5
Max. working temperature / max pressure in tank [$^{\circ}C$ / Bar]	80 / 6	80 / 6	80 / 6	80 / 6
Temperature set by producer [$^{\circ}C$]	55	55	55	55
Energy efficiency class	A	A	A	A

Dimensions:

Typ	TO 5.1 UP TO/E 5.1 UP	TO 10.1 UP TO/E 10.1 UP	TO 5.1 IN TO/E 5.1 IN	TO 10.1 IN TO/E 10.1 IN
A	330	465	338	473
B	265	400	-	-
C	-	-	93	93
D	290	290	290	290
E	275	275	275	275

Connection 1 - 1/2" outside, possibility of using of the flat sealing

Contact:

Družstevní závody Dražice-strojárna s.r.o.
Dražice 69
CZ 294 71 Benátky nad Jizerou
E-mail: export@dzd.cz